



Vixagon VMT

Installation Manual

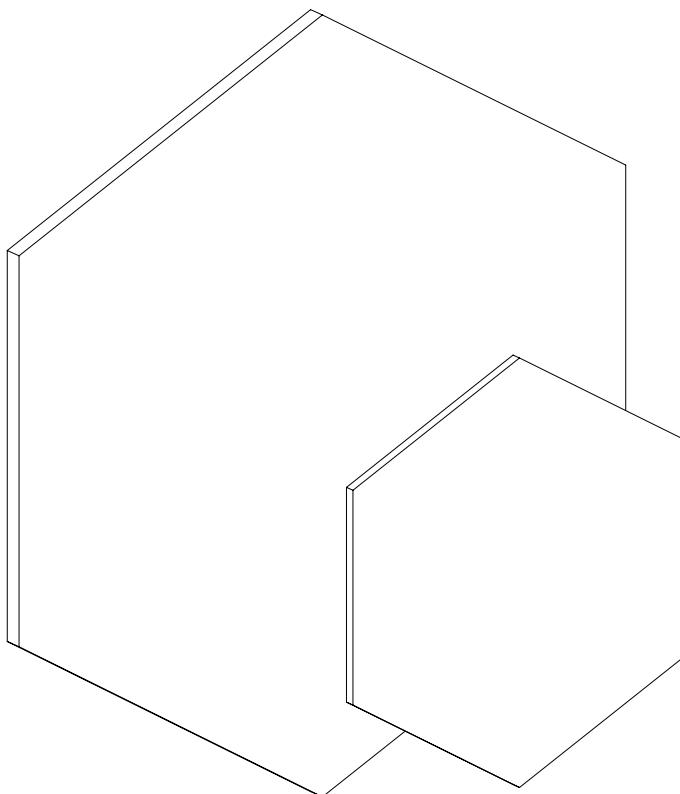


MATERIAL NEEDED

Included




Vixagon
595x687x20mm (x12/ box)
595x687x40mm (x6/box)




Vixagon Mini
298x344x20mm
(x 36+36/box)
(x 12+12/box)

Not Included



Level




Glue




Measuring Tape


Available formats



Vixagon
700x607x20mm
700x607x40mm




Vixagon Mini
355x305x20mm




If the nozzle is not already cut, cut it according to the diagram.

1

Apply the glue on the back of the acoustic panel, near the edges, but still in the foam part of the panel (approx. 2"/5 cm from the edge). Do not wait longer than 10 minutes after applying the glue to attach the panel to the wall.

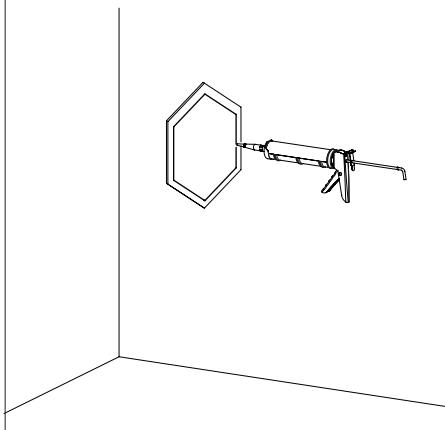**2**

Place the panel in the predefined position. Once in the desired place, press firmly against the wall for 15 seconds.

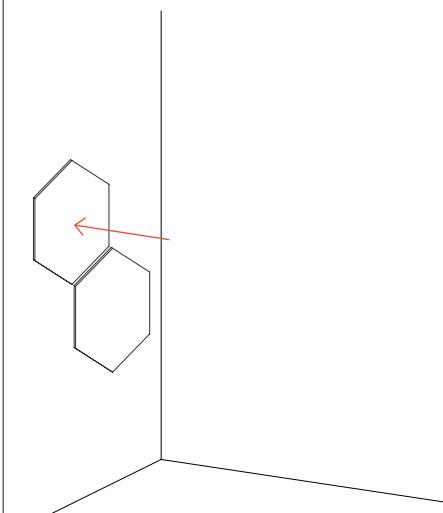

Use the same process to install the panels on the ceiling with Flexi Glue Ultra .



Always apply the glue in stripes. Do not apply the glue in dots. When applying the glue, position the nozzle tip pre-cutted at 45° angle, so that it applies some pressure on the glue against the back of the panel. For ceiling panel installations, you may need to use ceiling supports to hold the panels in place while the glue dries. To ensure that you maximise the strength of the glue, don't make any adjustments or remove the panel after bonding.

Wall and ceiling surfaces should be examined prior to installation, ensuring they are clean, smooth, and dry. If you have unpainted gypsum board surfaces, these should be primed with a drywall primer (or another material manufactured especially for the purpose), to equalize the absorption between the gypsum board face paper, joint compound, and skin coating materials. You should then apply the paint, and allow air circulation in order to dry the paint within the time frame specified by the paint manufacturer. Please ensure the paint is dry before installing the acoustic panel. Make sure the room has all the necessary conditions to receive the acoustic panels. After you apply the glue on the back of each acoustic panel, please ensure you hold the acoustic panel against the wall the required time (mentioned above), and ensure it stays fixed in place. This method is also applicable to ceiling installations.



Do not apply Vixagon VMT behind radiators or too close to a heat source.

Main Office, R&D & Logistics
Avenida do Pólo 3, Nº 159, Carvalhosa
4590-137 Paços de Ferreira, Portugal

Office
Rua Quinta do Bom Retiro Nº 16, Armazém 9
2820-690 Charneca da Caparica, Portugal
T (+351) 212 964 100

Info and Sales
E sales@vicoustic.com
www.vicoustic.com

VICOUSTIC
INNOVATIVE ACOUSTIC SOLUTIONS