

## Product Information

# Flexi Screen V2

PROFESSIONAL AUDIO



### Description

This new version of the classic Flexi Screen Lite, has an optimized design, with a more pronounced curvature, perfectly surrounding the microphone, absorbing the unwanted exterior noises. The microphone socket has also been changed and is now compatible with EU and USA microphones.


The acoustic foam structure of the Flexi Screen Lite V.2 has optimum density and thickness, using a series of cavities to enhance the absorption effect and add structural support to the joint mechanism.

The Flexi Screen Lite V.2 is suitable for use with a variety of microphones and can be adjusted vertically or horizontally. The unit can be mounted in less than 15 seconds, making it ideal for location-based recording locations, design studios and classrooms.

### Applications:

Voice and instrument recording

### Performance

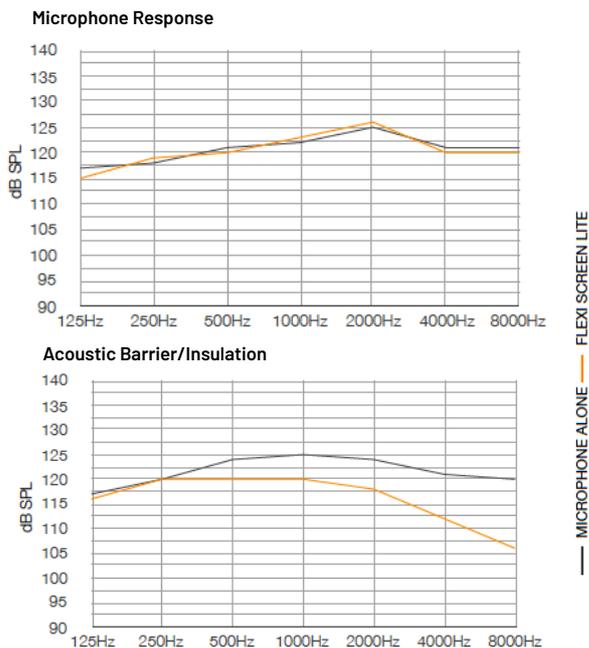

### Available Finishes

N/A

### Dimensions\*

438 x 275 x 355 mm\* / 23.4" x 10.8" x 13.1"

\* For each panel. Please notice that the dimensions of these panels have a tolerance of +/- 2mm

### Packing Information

**Units per box:** 6

**Box:** 740 x 420 x 630 mm / 27.5" x 16.5" x 24.8"

**Box Gross Weight:** 6,6kg / 14,5lb

### Technical Information

**Material:** Polyurethane Foam

**Fire Rating:**

- Europe: Euroclass F

**Installation:** Mechanical fixation

### More information:

[www.vicoustic.com/products/flexiscreenlitev.2](http://www.vicoustic.com/products/flexiscreenlitev.2)