

Vixagon VMT HF PA PS WS


Vixagon VMT is a perfect solution to cushion and reduce sound levels in a cost-effective way. Vicoustic's standard patterns and solid colors for the Vixagon VMT are stylish and work in many different aesthetics and particularly in strongly designed architectural spaces. This product can be used on walls and ceilings and adapted easily owing to its unique shape.

A smaller and more compact version of Vixagon, Vixagon Mini, is also available, offering all of the same acoustic solutions, just in a smaller and more manageable size to create more intricate and creative patterns.



The Vixagons Mini are packed in a really innovative way: we are using the same material as the product itself as packaging material. This will give the bonus of having extra Diamond shapes that can be used in conjunction with your Vixagon to create your art-work.

Acoustic Performance

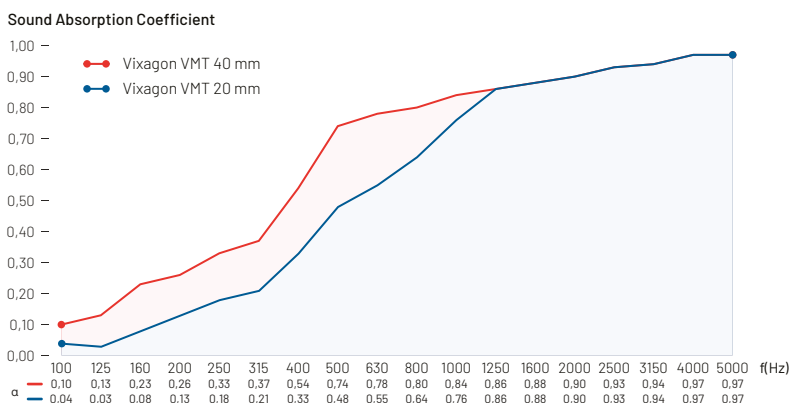

Technical Information

Dimensions: **A** 687×595×20mm / 27"×23.4"×0.8"; **B** 687×595×40mm / 27"×23.4"×1.6";

C 344×298×20mm / 13.5"×11.7"×0.8" (L×H×W, per panel)

Raw Materials: VicPET Wool

Fire Rate: **A B C** Europe: Euroclass B -s2, d0; USA: Class A (ASTM-E84);

A C Canada: CAN/ULC S102, Flame Spread Rating: 5, Smoke Developed Classification: 115

Acoustic Properties: Medium and High Frequencies Absorption

NRC: **A C** 0.55; **B** 0.7

Installation/Accessories: Flexi Glue Ultra; VicFix Magnetic; Velcro

Packaging Information

Units per Box: **A** 12 units/box; **B** 6 units/box; **C** 36 units/box

Box Dimensions: **A C** 745×645×240mm / 29.3"×25.4"×9.4";

B 745×645×395mm / 29.3"×25.4"×15.5"

Box Gross Weight: **A C** 7.25kg / 16lb; **B** 4.1kg / 9lb

vicoustic.com/product/vixagon-vmt



VMT Finishes

Solid Colors



Collections and Patterns

Find all available finishes at vicoustic.com

f(Hz)	Sound Absorption Coefficient*
100	0.10
125	0.13
160	0.23
200	0.26
250	0.33
315	0.37
400	0.54
500	0.74
630	0.78
800	0.80
1000	0.84
1250	0.86
1600	0.88
2000	0.90
2500	0.93
3150	0.94
4000	0.97
5000	0.97

* For Vixagon VMT 40 mm

Certifications



Different product batches may show a color variation. Product dimensions of these panels have a tolerance of +/- 2mm. The product images used are illustrative and may differ from the actual product.

Info and Sales: sales@vicoustic.com

VICOUSTIC